


Front View

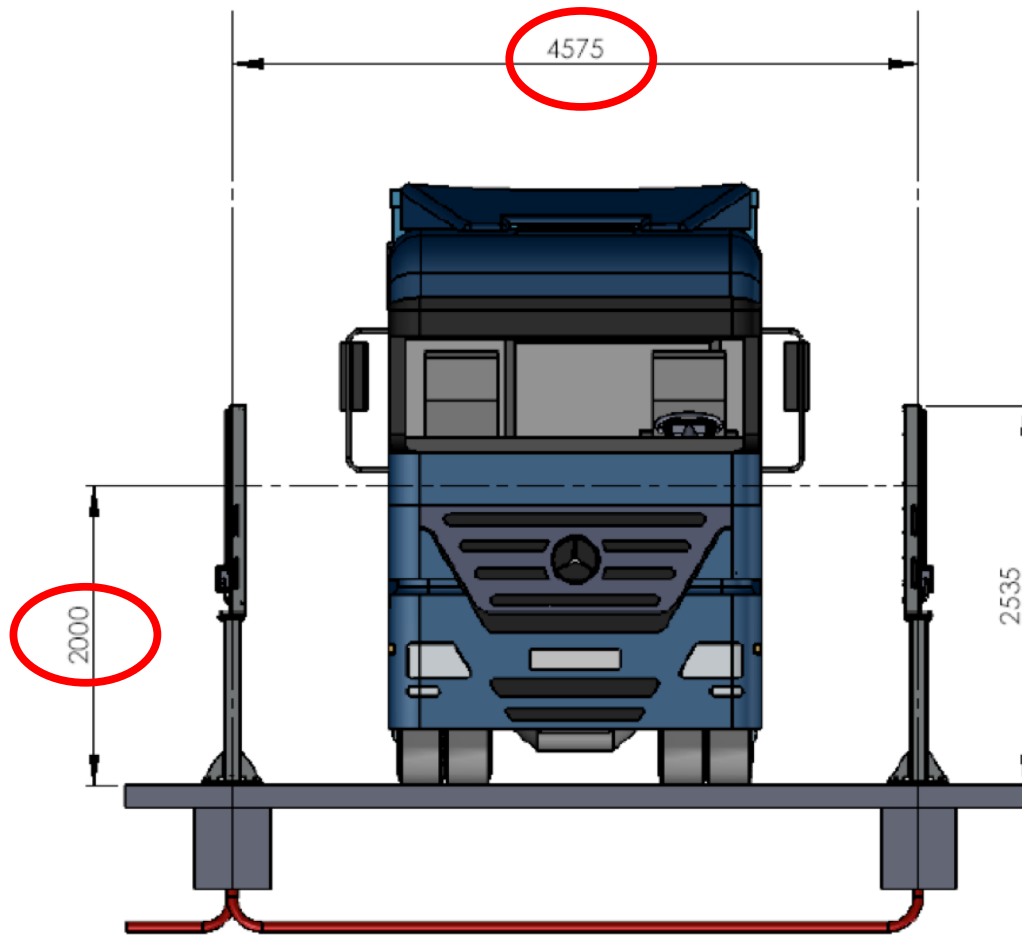


- ✓ Max detectors distance: 4,5M
- ✓ Detectors shall be positioned so that no vehicle stops around them (buffer zone 5 meters)
- ✓ Best position: 2 / 3 meters before the scale
- ✓ Respect the detection axis
- ✓ No vehicle operations / parking on the gate
- ✓ Safe logistic positioning
- ✓ S.R. Concrete basement

SAPHYGATE G – INSTALLATION HINTS

29

Top View – Vehicle 2x detectors & Railway 4X detectors

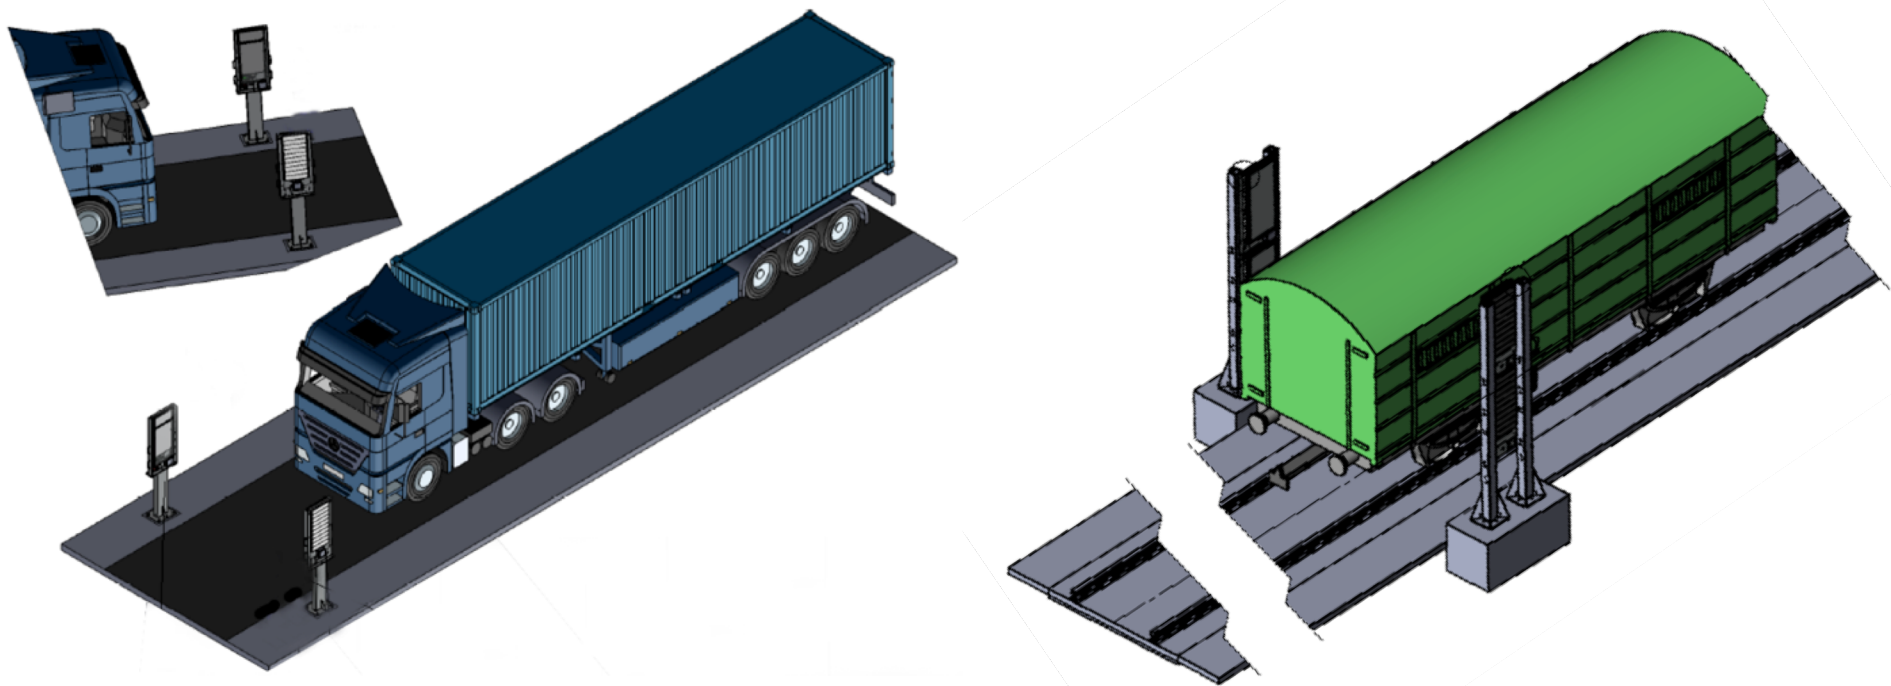

Vehicle Speed <10km/h

SAPHYGATE G – INSTALLATION HINTS

30

Wiring


#1: 2x2x0,5 twisted shielded cable <25m

#2: 2x1,5 shielded cable (24Vdc) –
Increased section according to length

#3: cat6 shielded ethernet cable

▷ Standard cable length: <100M (#2, #3)

▷ All cables in cable sleeves!!!



↑ #2 & #3

